
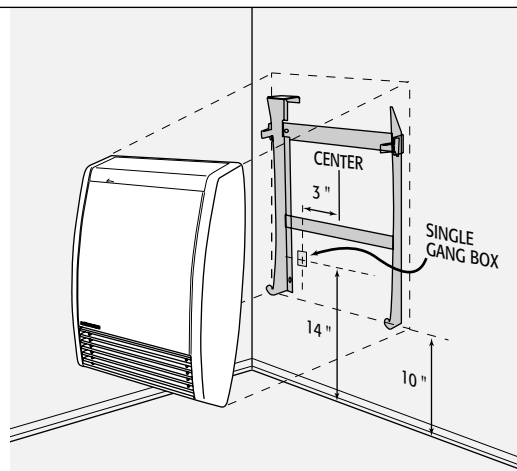


Small on size and big on efficiency, the **Calypso** is equipped with an electronic thermostat for basic heating, a fan-forced heater and a timer for quick heat when you want it. It's recommended for all bathrooms.

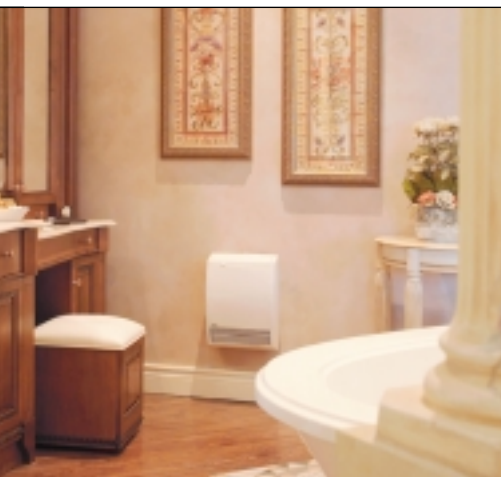

**HEATING ELEMENT**

**Quick heat Fan-forced heat** : Low-thermal-mass heating element combined with low-pressure tangential blower. Resetable overheat protection. (1500 or 2000 W) Reset by turning heater off.

**TEMPERATURE CONTROL**

**Electronic thermostat** Built-in electronic proportional-action thermostat for the basic heating.  
**Timer** 0-30 minute resetable mechanical timer for quick heating.

**CONTROL PANEL**

**Location** Located on top of the unit with protective cover.  
**Switch** On/Off switch, also serves as reset for overheat protection.  
**Dial 1** Thermostat control.  
**2** Timer dial.  
**Indicator light 1** Heating indicator light.  
**2** Overheat of saturated filter warning indicator light.

**CABINET**

**Steel construction** with polyester/epoxy anti-rust powder coating.  
**Cabinet** Splash-proof construction with rounded edges and built-in side wire covers.  
**Louvres** Bottom grille directs the hot air downwards, towards the centre of the room to ensure even temperature.  
**Filter** Easy-to-clean, removable rear-mounted dust filter for easier maintenance.  
**Color BB** = White

**INSTALLATION**

**Installation** Quick-mounted surface installation with easy snap-on bracket that also serves as marking template.  
**Connection** 240-V unit: Armoured cable complete with junction box cover and wire connector supplied with heater. Installation requires a wall box (not included).  
 120-V unit : Plug-in connection with 6' flexible cord.  
**Installation height** 10 in  
**Clearances** ■ Front: 20 in ◀ Sides: 4 in ▲ above: 12 in  
**Note** 240-V unit: 3-conductor cable or 2-conductor cable with a third wire should be used if unit is to be linked with the Convectair Programmer module (7392 FP).

MODEL	Catalog No.	Color	Power 240-V	Height in	Width in	Thickness in	Weight p
CALYPSO ②	A7825-C20	BB	1000 - 2000 W	16	12 1/4	5 1/2	11,0

120 VOLTS   PLUG-IN							
CALYPSO ④	7825-B15	BB	750 W - 1 500 W	16	12 1/4	5 1/2	11,0

② Compatible with the Convectair Programmer system (see technical specifications for catalogue number 7392).  
 ④ Not compatible with the Convectair Programmer system; plugs into a 120-V socket.

*For guaranteed, dependable operation, we recommend that all units be installed by a licensed electrical contractor.*

