

Allegro II



INSTALLATION AND CONNECTION

Installation height 4 in (10 cm).

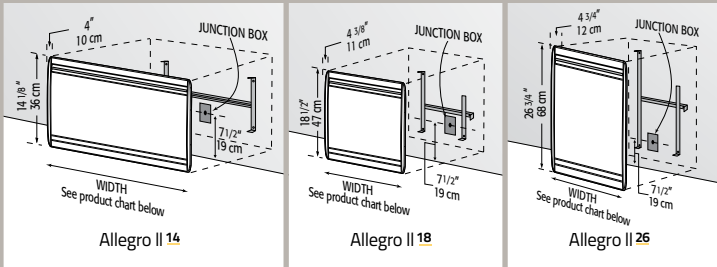
Clearances

■ Front: 20 in (50 cm) ◀ Sides: 6 in (15 cm) ▲ Above: 4 in (10 cm).



Installation Quick-mounted surface installation with easy snap-on bracket that also serves as marking template.

Connection 240-V unit: Flexible cord connection, including junction box cover. Installation requires 2 in X 3 in wall box (not included).


Note 3-conductor cable or 2-conductor cable with a third wire should be used if unit is to be linked with the Convectair Programmer module (7392 FP).




HEATING ELEMENT

-  **Total capacity** 750 to 2000 W
-  **Convection** X-shaped, monoblock element made of surface-treated extruded aluminum.
- Thermal Protection** Manual reset overheat protection.


TEMPERATURE CONTROL




-  **Electronic thermostat** Lockable built-in electronic proportional-action thermostat ultraprecise to 1/5 °F (1/10 °C) with digital controls.
- Programer** Control panel designed to accept the 7392 Programer module.




CONTROL PANEL "Select unit of temperature in °F or °C."

-  **Location** On top right-hand side of the unit, with lockable protective cover.
- LCD screen** with digital controls lockable by key combination.
- On/Off button.**
- Mode button** with four settings: Comfort; Economy; Frost protection (45 °F (7 °C)); Program (automatic setback when connected to the Convectair Programer).
- « + and - » buttons** set the temperature and lock the controls.
- Heating indicator light.**

CABINET

-  **Steel** construction with polyester/epoxy anti-rust powder coating and resistant to UV rays.
- Cabinet** Bottom-mounted protective pan with rounded edges.
- Louvres** Front-louvered air outlet that hides the unit interior and directs heat towards the center of the room.
- Color** FS = White

Catalog No. Model Color	7315  ALLEGRO II ¹⁴ FS						7316  ALLEGRO II ¹⁸ FS				7317  ALLEGRO II ²⁶ FS			
	Power		Width		Net Weight		Width		Net Weight		Width		Net Weight	
	240 V	208 V	cm	po	kg	lb	cm	po	kg	lb	cm	po	kg	lb
C07	750 W	565 W	56,9	22 3/8	4,9	10,8	40,9	16 1/8	4,8	10,6	36,9	14 1/2	6,1	13,4
C10	1000 W	750 W	64,9	25 1/2	5,4	11,9	48,9	19 1/4	5,1	11,2	40,9	16 1/8	6,4	14,2
C15	1500 W	1125 W	84,9	33 3/8	6,8	15	64,9	25 1/2	6,2	13,7	56,9	22 3/8	8	17,6
C20	2000 W	1500 W	112,9	44 1/2	8,5	18,8	84,9	33 3/8	7,6	16,8	76,9	30 1/4	10,4	22,9

-  Compatible with the Programer system (see technical specifications for catalog number 7392).
-  Compatible with the Wall-mount controller AWC.
-  Control panel is designed to accept the 7392 Programer module.

For guaranteed, dependable operation, we recommend that all units be installed by an electrical contractor. Consult convectair.com to find the most recent installation instructions for our heaters.

